




Zoom H1 Handy Recorder Line-In Port Replacement

This guide will show you how to remove and replace a faulty line-in port.

Written By: Alex

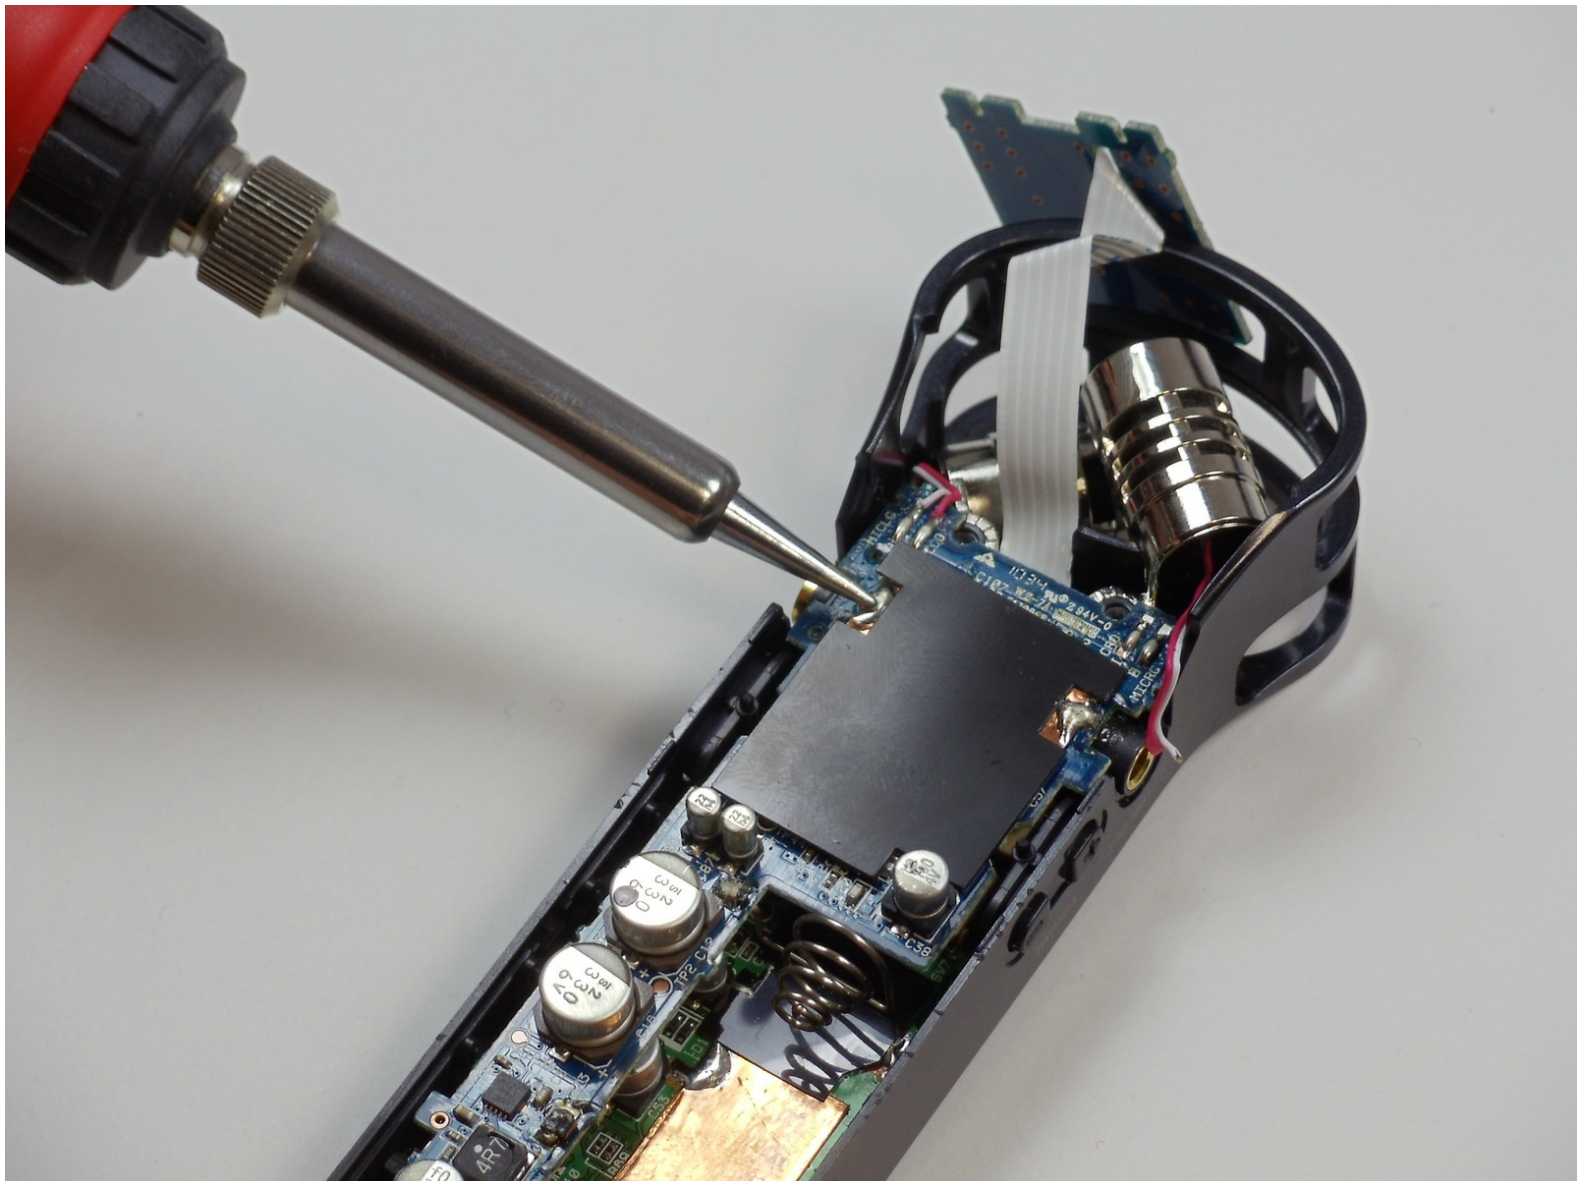



TOOLS:

- [Soldering Station](#) (1)
 - [Phillips #00 Screwdriver](#) (1)
 - [iFixit Opening Tools](#) (1)
-

Step 1 — Line-In Port



- Flip device over so the display is facing down.

Step 2



- Remove battery cover by pressing down on battery cover and sliding right.

Step 3




- Unscrew the two (2) #00, 10 mm screws located below the microphones on the back cover.

Step 4



- Remove the back cover (using a plastic removal tool around the edges if needed).


Step 5

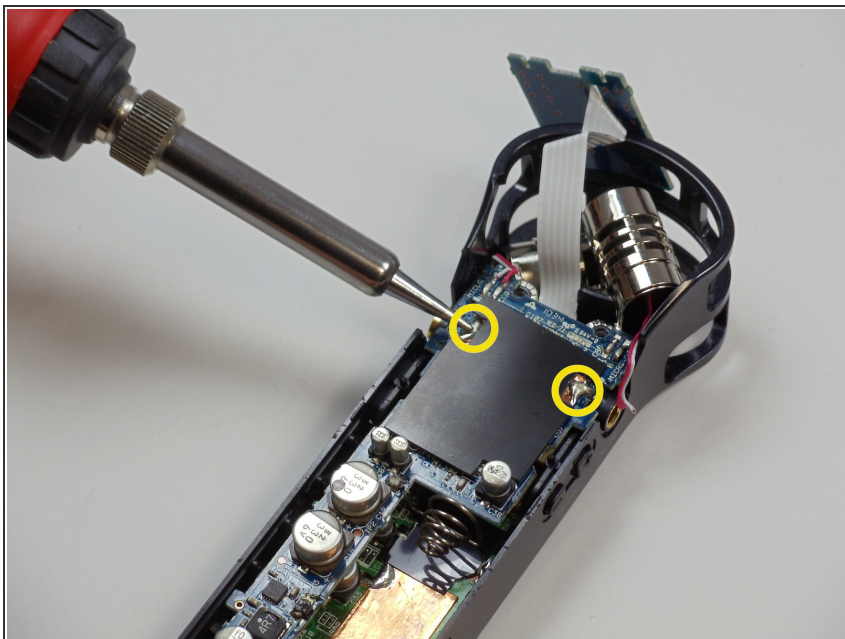


- De-solder and remove the heat shield.

⚠ Be careful while removing this shield, since the copper sheet is very easy to rip

Step 6

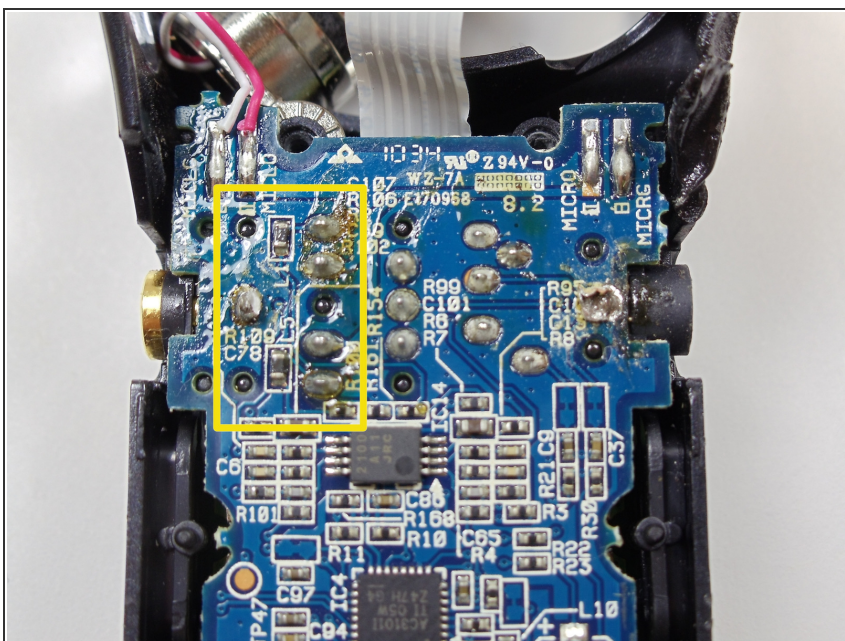



- De-solder the line in port from its soldering points.
- These points are located beneath the black shielding on the left side of the blue circuit board.

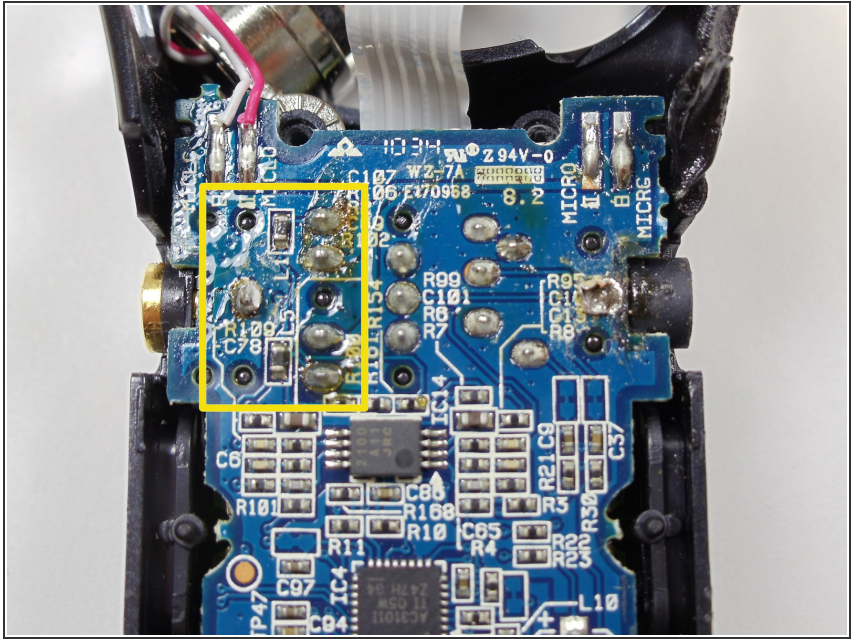

- Replace Line-in port and re-solder at points specified in Step 6.

Step 8

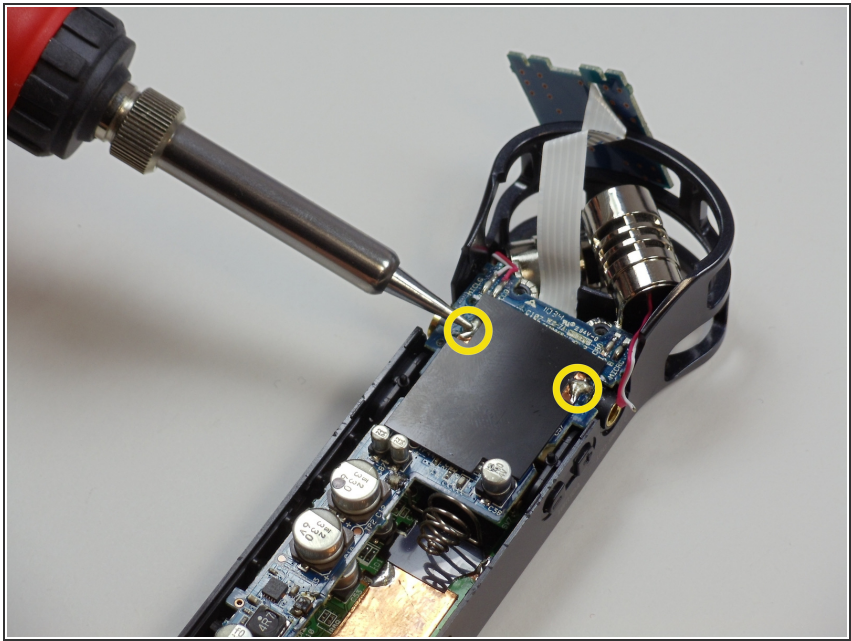

- Reattach and re-solder the heat shielding back into place.
-  Again, be careful when soldering as it is very easy to melt through the heat shield and copper sheet beneath.

To reassemble your device, follow these instructions in reverse order.